



# DISCOVER MATT FINISHES Octoral matt clear



## OCTORAL MATT CLEAR

## ANY OEM OR CUSTOM MATT FINISH

Offering top-quality custom finishes is good for business. Refinishing premium brand vehicles commands premium rates.

Until now, reproducing OEM or custom matt finishes accurately has been challenging and time-consuming. Not anymore.

Reproduce OEM and custom finishes quickly, consistently and with outstanding results with the new Octoral Matt Clear. To achieve a full range of matt levels needed, the new Octoral Matt Clear System mixes two clear coats (low gloss and semi gloss), plus a dedicated matt hardener and thinner. A Matt Clear Swatch aids accurate matching. Flash-off times are 10-15% faster<sup>1</sup> than competitor products, accelerating workflow, and the final Octoral Matt Clear finish is just as resistant and durable as the factory-applied original.

FAST

CONSISTENT

TOP QUALITY

VERSATILE

EASY TO USE

**PROFITABLE** 

690102001 Octoral Matt Clear Swatch

## SPEED. CONSISTENCY. QUALITY.

**FAST.** 10-15% faster<sup>1</sup> flash-off than competitors, to accelerate workflow.

TOP QUALITY. Polyurethane two clear coat mixing system ensures superior matching and finish compared to using one clear coat with a matting agent/additive.

EASY TO USE. Uniform, even finish with cross layer application.


**CONSISTENT.** Achieve high-quality OEM-standard results every time.

VERSATILE. Match matt levels precisely by mixing low gloss and semi gloss clear coats.


**PROFITABLE.** Increase profitable OEM repair and custom finish business.

## OCTORAL MATT CLEAR MIXING RATIOS

Mixing ratio by weight and volume Low Gloss Semi Gloss Gloss units (60°)

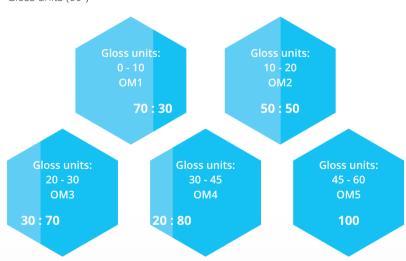

# OCTORAL MATT CLEAR SYSTEM WITH

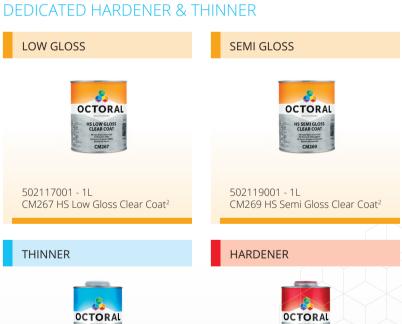

OCTORAL MATT CLEAR CLEANING AND CARE

Important information and advice for car owners on cleaning and care for Octoral Matt Clear finishes is available at www.octoral.com/mattclear

### EASY APPLICATION

- Easy to spray, with a fast flash-off
- Cross layer application
- Standard gun set up
- 2.5 coats (45-60 μm)
- Recommended application temperature is 15-30°C

Note: to check gloss level and colour match, spray a test panel first.



2 medium-wet closed coats with cross layer application 15 - 20 minutes flash off between cross layers

Before force cure 30 minutes flash off TM261 II

S MATT CLEAR

304200001 - 1L TM261 HS Matt Clear Coat Thinner



HS MATT CLEAR

200108001 - 1L HM260 HS Matt Clear Coat Hardener

For further technical information, please refer to the latest Technical Data Sheet (TDS).

## DISCOVER WHICH CLEAR COAT SUITS YOU BEST

Matt Clear joins the Octoral clear coat range to create any level of matt or gloss finish. Use with existing Octoral coatings for the perfect result, time after time. Please contact your local Octoral representative for more details.

Figures are based on publicly available competitor information.
To avoid settling, the Octoral Matt Clear Coats should be placed on a mixing machine.

valspar AUTOMOTIVE

www.octoral.com

# OCTORAL A VALSPAR AUTOMOTIVE BRAND

Octoral is a Valspar Automotive brand. Valspar Automotive is part of the Valspar Corporation. Valspar Automotive in Lelystad (NL) is a subsidiary of Sherwin-Williams, one of the world's leading manufacturers of coatings. Valspar Automotive produces and distributes the following colour mixing systems: Octoral<sup>®</sup>, DeBeer Refinish<sup>®</sup>, Matrix<sup>®</sup>, Prospray<sup>®</sup> and Valspar Refinish<sup>®</sup>.

### MORE INFORMATION

For more information about Octoral or Valspar automotive please visit: www.octoral.com and www.valsparauto.com

## REMARKABLE IN REFINISHING

**Valspar AUTOMOTIVE** 690155002

www.valsparauto.com